

7-31-00

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)

Approved for use through 9/30/2000. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

018236.116

First Inventor or Application Identifier

Kevin N. McCraw et al

Title

MATTRESS SPRING CUSHION ASSEMBLY WITH ...

Express Mail Label No.

EL036042753US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 202311. ☒ \*Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original, and a duplicate for fee processing)2. ☒ Specification [Total Pages **10**]  
(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total **7**]4. Oath or Declaration [Total Pages **3**]

- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. 1.63(d))  
(for continuation/divisional with Box 16 completed)
- [Note Box 5 below]
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).

\*NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL  
ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. 1.27),  
EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. 1.27).

5. ☐ Microfiche Computer Program (Appendix)6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☒ 37 C.F.R. 3.73(b) Statement ☒ Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement(s) ☐ Statement filed in prior application,  
Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_ / \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_

Group / Art Unit \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

021878

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name

Karl S. Sawyer, Jr.

Kennedy Covington Lobdell &amp; Hickman, LLP

Address

Bank of America Corporate Center, Suite 4200

100 North Tryon Street

City

Charlotte

State

NC

Zip Code

28202-4006

Country

US

Telephone

704 331-7400

Fax

704 331-7598


Name (Print/Type)

Karl S. Sawyer, Jr.

Registration No. (Attorney/Agent)

28,902

Signature



Date

July 28, 2000

Burden Hour Statement: This form is estimated to take 1.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

INVENTOR:

**Kevin N. McCraw**  
Highway 80 South  
P.O. Box 125  
Micaville, NC 28755

**Stuart Spiller**  
2216 South 24<sup>th</sup> Street  
P.O. Box 1023  
Sheboygan, WI 53082

TITLE:

**MATTRESS SPRING CUSHION ASSEMBLY  
WITH COMBINATION OF RIGHT-HAND AND  
LEFT-HAND SPRING UNITS**

ATTORNEY DOCKET NO.:

018236.116

DATE:

July 28, 2000

Please address all correspondence in this application to:

Karl S. Sawyer, Jr.  
KENNEDY COVINGTON LOBDELL & HICKMAN, L.L.P.  
Bank of America Corporate Center, Suite 4200  
100 North Tryon Street  
Charlotte, NC 28202-4006  
(704) 331-7400

**CERTIFICATE OF MAILING:**

"Express Mail" Mailing Label No. EL036042753US

Date of Deposit: July 28, 2000

I hereby certify that this paper or fee is being deposited with the  
United States Postal Service "Express Mail Post Office to Addressee"  
Service Under 37 CFR 1.10 on the date indicated above and is  
addressed to the Assistant Commissioner for Patents,  
Washington, DC 20231

Typed Name: Donna B. Millard

Signature: Donna B. Millard

# MATTRESS SPRING CUSHION ASSEMBLY WITH OPPOSING SPRING COILS

## Background of the Invention

The present invention relates generally to cushions assembled with a plurality of spring coils and, more particularly, to such a spring cushion assembly suitable for use in a mattress comprised of a combination of spring coils which oppose one another either by opposing  
5 inclinational or rotational tendencies, e.g., right-hand and left-hand spring coils.

Spring cushion assemblies of the aforementioned type are well known within the furniture industry for use as so-called innerspring constructions for mattresses as well as other forms of upholstered furniture. Characteristically, such cushion assemblies comprise a plurality of resiliently compressible spring coils arranged in adjacent side-by-side disposition in a selected  
10 systematic array, most commonly in linear rows and columns, and connected together, e.g., by metal bands, clips, strings, helical wires, or the like, to form an integrated spring cushion assembly. Such spring cushion assemblies used for mattresses also commonly include border wires, which may be continuous or discontinuous, forming a perimeter outwardly about and connected to the upper and lower end turns of the outermost spring coils.

The types, configurations and constructions of the spring coils utilized in such spring cushion assemblies are quite diverse and may differ, for example, according to the type and size (gauge) of the wire from which the spring coils are made, whether the upper and lower end turns of each spring coil are closed (typically by knotting the terminal wire ends to a medial point along the end coil) or open (i.e., the terminal wire ends are left free and unconnected), the  
15 number of intervening coil turns between the opposite end turns (which may be a whole number of turns or may include a one-half coil turn), and whether the spring coils are separate wire units or part of a common length of wire, as with so-called continuous coil spring units (see, e.g., U.S. Patent Nos. 4,053,956 and 4,358,097).  
20

In producing any given spring cushion assembly, the selection among these various  
25 characteristics for the spring coils is made according to considerations of the desired spring characteristics for the cushion assembly (e.g., spring compressibility, strength, etc.), cost, structural stability and rigidity of the cushion assembly, etc. For example, spring coils whose end turns are closed by knotting tend to utilize more wire and to be more expensive to produce than open-ended spring coils. However, open-ended spring coils constructed with a full number of  
30 coil turns exhibit a pronounced tendency to incline laterally and to rotate in the direction of their hand (clockwise for right-hand coils and counterclockwise for left-hand coils) when compressed. Hence, when spring cushion assemblies are made of open-ended spring coils, it is not uncommon to utilize spring coils each of a right-hand coiling in each alternating row of spring coils and to

utilize spring coils each of a left-hand coiling in each intervening row of spring coils, because the oppositely handed spring coils will tend to incline and rotate in opposite directions under compression and thereby will tend to counter balance one another and enhance the lateral stability of the overall cushion spring assembly.

## 5 **Summary of the Invention**

It is accordingly an object of the present invention to provide further improvements in spring cushion assemblies of the aforementioned type and, in particular, to provide a spring cushion assembly with more enhanced lateral stability against spring coil incline and rotation than in the prior art.

10 Briefly summarized, the present invention addresses the foregoing objective by providing a spring cushion assembly which comprises a plurality of spring coils each of which is of a configuration producing a tendency to incline laterally when compressed. According to the present invention, the plurality of spring coils are aligned with one another in parallel linear spring coil rows and parallel linear spring coil columns perpendicular to the spring coil rows,  
15 with each spring coil row and each spring coil column having spring coils oriented relative to one another to incline in opposing directions for counteracting the tendency of the spring coils to incline.

Various embodiments of this basic construction are contemplated. For example, in one preferred embodiment, the spring coils comprise right-hand and left-hand spring coils alternating  
20 with one another within each row and each column. This embodiment offers the advantage that the oppositely handed spring coils counteract their respective tendencies to rotate oppositely as well as to incline oppositely. Alternatively, however, it is also contemplated that a spring cushion assembly in accordance with the present invention may be formed entirely of spring coils of the same hand by orienting alternating and intervening spring coils within each row and  
25 column in opposing orientations, e.g., rotated one hundred eighty degrees from one another, whereby each spring coil tends to incline oppositely to each adjacent spring coil so as to effectively counteract each other. It is further contemplated that the invention could be embodied in a spring cushion assembly made of continuous coil units by forming the alternating and intervening spring coils in each common length of wire to be of opposing orientations or  
30 opposing hands.

In many possible embodiments, the spring coils will be of the open-ended type having open upper and lower end turns, and often will have a full number of coil turns therebetween. Many embodiments will also have multiple helical connector wires extending between adjacent spring columns for connecting the respective upper and lower end coils thereof and with upper

and lower perimeter border wires disposed outwardly about the spring coils and connected to the upper and lower end turns of the outermost spring coils, thereby for integrating the spring coils together. Preferably, the spring cushion assembly is adapted for use as a mattress spring assembly.

5 **Brief Description of the Drawings**

Fig. 1 is a schematic top plan view of a prior art mattress spring cushion assembly comprised entirely of spring coils of a common hand and in a common orientation;

Fig. 2 is another schematic top plan view, similar to Fig. 1, of a prior art mattress spring cushion assembly comprised of alternating rows each entirely of right-hand or left-hand spring coils in a common orientation;

Fig. 3A is a perspective view of a single open-ended right-hand spring coil in relaxed uncompressed condition;

Fig. 3B is another perspective view of the right-hand spring coil of Fig. 3A in compressed condition;

Fig. 4A is another perspective view, similar to Fig. 3, of a single open-ended left-hand spring coil in relaxed uncompressed condition;

Fig. 4B is another perspective view of the left-hand spring coil of Fig. 4A in compressed condition;

Figs. 5A and 5B are schematic side elevational views respectively depicting the right-hand spring coil of Fig. 3 in uncompressed and compressed states and illustrating the tendency of such spring coil to incline laterally when compressed;

Figs. 6A and 6B are schematic side elevational views, similar to Figs. 5A and 5B, depicting respectively the left-hand spring coil of Fig. 4 in uncompressed and compressed states and illustrating the tendency of such spring coil to incline laterally when compressed;

Fig. 7 is a schematic top plan view of a mattress spring cushion assembly according to a preferred embodiment of the present invention wherein right-hand and left-hand spring coils alternate with one another within each column and row of the spring coils;

Fig. 8 is a schematic side elevational view of adjacent left-hand and right-hand spring coils within the mattress spring cushion assembly of Fig. 7, depicting the effect of the oppositely handed spring coils to counteract their respective tendencies to incline laterally when compressed; and

Fig. 9 is a schematic top plan view of a mattress spring cushion assembly according to an alternative embodiment of the present invention formed entirely of right-hand spring coils

alternating and intervening ones of which within each row and column are disposed in opposing orientations rotated one hundred eighty degrees from one another.

### **Detailed Description of the Preferred Embodiment**

Referring now to the accompanying drawings and initially to Figs. 1 and 2, prior art mattress spring cushion assemblies of the types described above are depicted generally at 10 and 12, respectively. Each mattress spring cushion assembly 10, 12 comprises a plurality of open-ended spring coils 14 arranged in adjacent side-by-side relation in parallel linear rows 16 and parallel linear columns 18 perpendicular to the rows 16. The spring coils 14 in each spring assembly 10, 12 are of the open-ended type with open upper and lower end turns 14', 14'' with one or more helical turns 14''' extending integrally therebetween, as more fully depicted in Figs. 3 and 4. The spring coils 14 are disposed with their respective upper and lower end turns 14', 14'' in co-planar relationship with one another, the upper and lower end turns of adjacent columns 18 being connected via interengagement within the spirals of elongate helical connector wires 20 each extending the full length of the respective spring assembly 10, 12. Each spring assembly 10, 12 additionally incorporates upper and lower rectangular border wires 22, typically of a much heavier gauge than the wires of the spring coils 14 and the helical connector wires 20, the border wires 22 extending about the perimeter of the array of spring coils 14 respectively adjacent the upper and lower end turns 14', 14'' of the outermost rows 16 and columns 18 and connected thereto by metal bands or clips 24.

In the prior art spring assembly 10 of Fig. 1, each spring coil 14 in each row 16 and column 18 is of the same hand with all spring coils disposed in the same orientation as one another. As illustrated, the spring assembly 10 is made entirely of right-hand spring coils wherein the intermediate coil turns 14''' are formed with a right-hand spiral, i.e., when viewed axially from the upper end turn 14' downwardly to the lower end turn 14'', the turns 14''' of the spring coil spiral in a clockwise direction, as best seen in the perspective view of a single right-hand spring coil 14 in Fig. 3. As will additionally be seen in Fig. 3, the spring coil 14 thereof has three complete intervening coil turns 14''', whereby the upper and lower end turns 14', 14'' open laterally oppositely from one another. Of course, the spring assembly 10 could alternatively be comprised entirely of open-ended left-hand spring coils 14 such as shown in Fig. 4. Like the right-hand spring coil 14 of Fig. 3, the left-hand spring coil 14 of Fig. 4 also has three complete intervening coil turns 14''' between its open upper and lower end turns 14', 14''.

As persons skilled in the relevant art will readily recognize and understand, such spring coils 14 of the type of Figs. 3 and 4 have a pronounced tendency to incline laterally (in opposite directions depending upon the hand of the spring unit) when compressed, as indicated by the

directional arrows in Figs. 3B and 4B and as depicted comparatively for a right-hand spring coil in Figs. 5A and 5B and, similarly, for a left-hand spring coil in Figs. 6A and 6B. Likewise, such spring coils also exhibit the inherent tendency to rotate in the direction of the hand of the spring coil when compressed, i.e., a right-hand spring coil will tend to rotate clockwise when compressed and a left-hand spring coil will tend to rotate counterclockwise when compressed, as indicated by the directional arrows in Figs. 3B and 4B. Hence, as is known, prior art mattress spring cushion assemblies of the type of the assembly 10 of Fig. 1, whether made entirely of right-hand spring coils or left-hand spring coils, exhibit the disadvantageous tendency for the entire assembly to incline and twist in a common direction when compressed, as depicted representatively by the directional arrows in Fig. 1, which impairs the lateral stability of the spring assembly 10.

The prior art spring cushion assembly 12 of Fig. 2 was intended to address the problem of lateral stability experienced by the spring assembly 10 of Fig. 1 by providing alternating rows 16', 16'' of left-hand and right-hand spring coils 14, the intent of which is for the oppositely-handed spring coils 14 of adjacent rows 16', 16'' to tend to counteract one another by the respective spring rows inclining and twisting in opposing directions. While the spring cushion assembly 12 of Fig. 2 provides some improvement in overall lateral stability in comparison to the spring cushion assembly 10 of Fig. 1 none of the individual spring coils 14 act in direct opposition to one another. Thus, there remains the tendency of the left-hand and right-hand spring coils 14 in a common row 16', 16'', respectively, to incline and twist together in a common direction, as represented by the directional arrows in Fig. 2, with the respective spring rows 16', 16'' acting in opposition to one another only indirectly via the connecting helical wires 20. As a result, the spring assembly 12 still exhibits an undesirable degree of lateral instability in the widthwise direction of the rows 16.

With reference now to Fig. 7, a preferred embodiment of the novel spring cushion assembly of the present invention is indicated generally at 26 in a schematic top plan view similar to that of Figs. 1 and 2. The spring assembly 26 in the embodiment of Fig. 7 is particularly adapted for use as the so-called innerspring assembly of a mattress, but as persons skilled in the art will recognize and understand, the principles of the construction of the spring assembly 26 are equally applicable to other cushion spring assemblies formed of multiple integrated spring coils. Like the spring assemblies 10, 12 of Figs. 1 and 2, the spring assembly 26 also comprises plural spring coils 14 arranged in widthwise rows 16 and lengthwise columns 18, with the upper and lower end turns 14', 14'' joined laterally by helical connector wires 20 and with upper and lower border wires 22 connected by bands or clips 24 to the upper and lower

end turns 14', 14'' of the spring coils 14 of the two outermost rows 16 and columns 18. The spring assembly 26 is distinguished from each of the spring assemblies 10 and 12 in that the spring coils 14 within each row 16 alternate between left-hand and right-hand spring coils 14, with the hand of the spring coils of each row 16 being staggered relative to the spring coils 14 of adjacent rows 16 such that the spring coils 14 within each column 18 also alternate between left-hand and right-hand spring coils (the only exception being one end row of spring coils 14 which is turned such that the open side of each upper and lower end turn 14', 14'' of the spring coils 14 within such row face inwardly of the array of spring coils 14 to better facilitate joinder to the border wire 22).

In this manner, it will be seen that each individual spring coil 14 within the spring assembly 26 is of a hand opposite that of each adjacent spring coil 14 on each opposite side thereof within the same row 16 and each adjacent spring coil 14 on each opposite side thereof within the same column 18. By this arrangement of the spring coils 14, the spring coils 14 act in direct opposition to one another both lengthwise along the columns and widthwise across the rows 16, as depicted in Fig. 7 and as also indicated by the arrows in Fig. 8, to counteract their individual tendency to incline and rotate when compressed, thereby providing significantly enhanced structural stability in each direction within the spring assembly 26.

While the embodiment of Fig. 8 utilizing both right-hand and left-hand spring coils will be preferred for various applications, it is also contemplated, however, that beneficial results and advantages may be achieved in accordance with the present invention in a spring cushion assembly formed entirely of spring coils of a common hand by arranging alternating and intervening spring coils in each row and column in opposing relative orientations or dispositions which will effectively counteract the tendency of each individual spring coil to incline when compressed. Such an alternative embodiment of a spring cushion assembly made entirely of right-hand spring coils is depicted in Fig. 9 generally at 28. In such embodiment, within each spring coil row 16, each alternating right-hand spring coil 14 is rotated one hundred eighty degrees with respect to each intervening spring coil 14 and the orientations of the spring coils 14 in adjacent rows 16 is staggered such that, within each spring coil column 18, each alternating right-hand spring coil 14 is likewise rotated one hundred eighty degrees with respect to each intervening spring coil 14. As with the embodiment of Fig. 7, this arrangement of the spring coils 14 effectively causes the spring coils 14 to act in direct opposition to one another both lengthwise along the columns 18 and widthwise across the rows 16 to counteract their individual tendency to incline when compressed, in the same manner as depicted in Fig. 8 and as also indicated by the arrows in Fig. 9, thereby providing enhanced structural stability in each direction



within the spring assembly 26. While the spring coils in this embodiment do not serve to counteract the tendency of one another to rotate when compressed, the alternating orientations of the spring coils 14 in accordance with the present invention still effectively counteract their inclinational tendencies and provides significant performance improvements over the prior art.

5 While the present invention has been described herein with respect to a preferred embodiment in a mattress spring cushion assembly comprised of open-ended coil spring units, it will be recognized by persons skilled in the art and it is to be understood that the present invention is not so limited and, in particular, is contemplated to be equally applicable and beneficial in mattress spring cushion assemblies comprised of closed, i.e., knotted, coil spring  
10 units, as well as in spring cushion assemblies intended for use in other articles of furniture, whether or not the spring coils in such an assembly are integrated together via helical connector wires, border wires, or otherwise. Similarly, while the present invention has been described herein with respect to embodiments of spring cushion assemblies utilizing individual spring coil units, it will similarly be understood that the invention is contemplated to be equally applicable to  
15 spring cushion assemblies made with other forms of spring coils, e.g., so-called continuous coil units wherein a continuous length of wire is formed into multiple successive spring coils.

It will therefore be readily understood by those persons skilled in the art that the present invention is susceptible of broad utility and application. Many embodiments and adaptations of the present invention other than those herein described, as well as many variations, modifications  
20 and equivalent arrangements, will be apparent from or reasonably suggested by the present invention and the foregoing description thereof, without departing from the substance or scope of the present invention. Accordingly, while the present invention has been described herein in detail in relation to its preferred embodiment, it is to be understood that this disclosure is only illustrative and exemplary of the present invention and is made merely for purposes of providing  
25 a full and enabling disclosure of the invention. The foregoing disclosure is not intended or to be construed to limit the present invention or otherwise to exclude any such other embodiments, adaptations, variations, modifications and equivalent arrangements, the present invention being limited only by the claims appended hereto and the equivalents thereof.

What is claimed is:

1. A spring cushion assembly comprising a plurality of spring coils aligned with one another in parallel linear spring coil rows and parallel linear spring coil columns perpendicular to the spring coil rows, each spring coil being of a configuration producing a tendency to incline laterally when compressed, each spring coil row and each spring coil column comprising spring coils oriented relative to one another to incline in opposing directions for counteracting the tendency of the spring coils to incline.
2. A spring cushion assembly according to claim 1, wherein the plurality of spring coils comprises a sub-plurality of right-hand spring coils and a sub-plurality of left-hand spring coils.
3. A spring cushion assembly according to claim 1, wherein, within each spring coil row and within each spring coil column, alternating spring coils are oriented to incline in a first direction and intervening spring coils are oriented to incline in a second direction in opposition to the first direction.
4. A spring cushion assembly according to claim 3, wherein the alternating and intervening spring coils are of opposing hands.
5. A spring cushion assembly according to claim 1, wherein each spring coil is of a configuration producing a tendency to rotate when compressed, each spring coil row and each spring coil column comprising spring coils oriented relative to one another to rotate in opposing directions for counteracting the tendency of the spring coils to rotate.
6. A spring cushion assembly according to claim 5, wherein, within each spring coil row and within each spring coil column, alternating spring coils are oriented to rotate in a first direction and intervening spring coils are oriented to rotate in a second direction in opposition to the first direction.
7. A spring cushion assembly according to claim 6, wherein the alternating and intervening spring coils are of opposing hands.
8. A spring cushion assembly according to claim 1, wherein at least selected ones of the spring coils comprise open end turns.
9. A spring cushion assembly according to claim 8, wherein the selected spring coils comprise open upper and lower end turns.
10. A spring cushion assembly according to claim 9, wherein each of the selected spring coils comprises a full number of coil turns between the open upper and lower end turns.
11. A spring cushion assembly according to claim 9, wherein each spring coil comprises an open upper end turn and an open lower end turn.

12. A spring cushion assembly according to claim 11, wherein each spring coil comprises a full number of coil turns between the open upper and lower end turns.

13. A spring cushion assembly according to claim 1, further comprising a perimeter border wire disposed outwardly about the plurality of spring coils and connected to selected ones thereof, and a plurality of connector wires extending between selected adjacent rows or selected adjacent columns and connected to the spring coils thereof for integrating the pluralities of spring coils together.

14. A spring cushion assembly according to claim 13, wherein each spring coil comprises an upper end turn and a lower end turn, the upper end turns of the plurality of spring coils being essentially co-planar with one another and the lower end turns of the plurality of spring coils being essentially co-planar with one another, and further comprising upper and lower perimeter border wires respectively disposed outwardly about and connected to selected ones of the co-planar upper and lower end turns of the plurality of spring coils, and upper and lower connector wires extending between selected adjacent rows or selected adjacent columns and connected respectively to the upper and lower end turns of the spring coils thereof.

15. A spring cushion assembly according to claim 13 or 14, wherein the connector wires are helical.

16. A spring cushion assembly according to claim 14, wherein the upper and lower end turns are open and each of the spring coils comprises a full number of coil turns between the open upper and lower end turns thereof.

17. A spring cushion assembly according to claim 13, 14 or 16, wherein the spring cushion assembly is a mattress spring assembly.

### **ABSTRACT OF THE DISCLOSURE**

A spring cushion assembly, particularly for mattresses, comprises a plurality of spring coils aligned with one another in parallel linear spring coil rows and parallel linear spring coil columns perpendicular to the spring coil rows, each spring coil being of a configuration producing a tendency to incline laterally when compressed, with each spring coil row and each  
5 spring coil column comprising spring coils oriented relative to one another to incline in opposing directions for counteracting the tendency of the spring coils to incline.

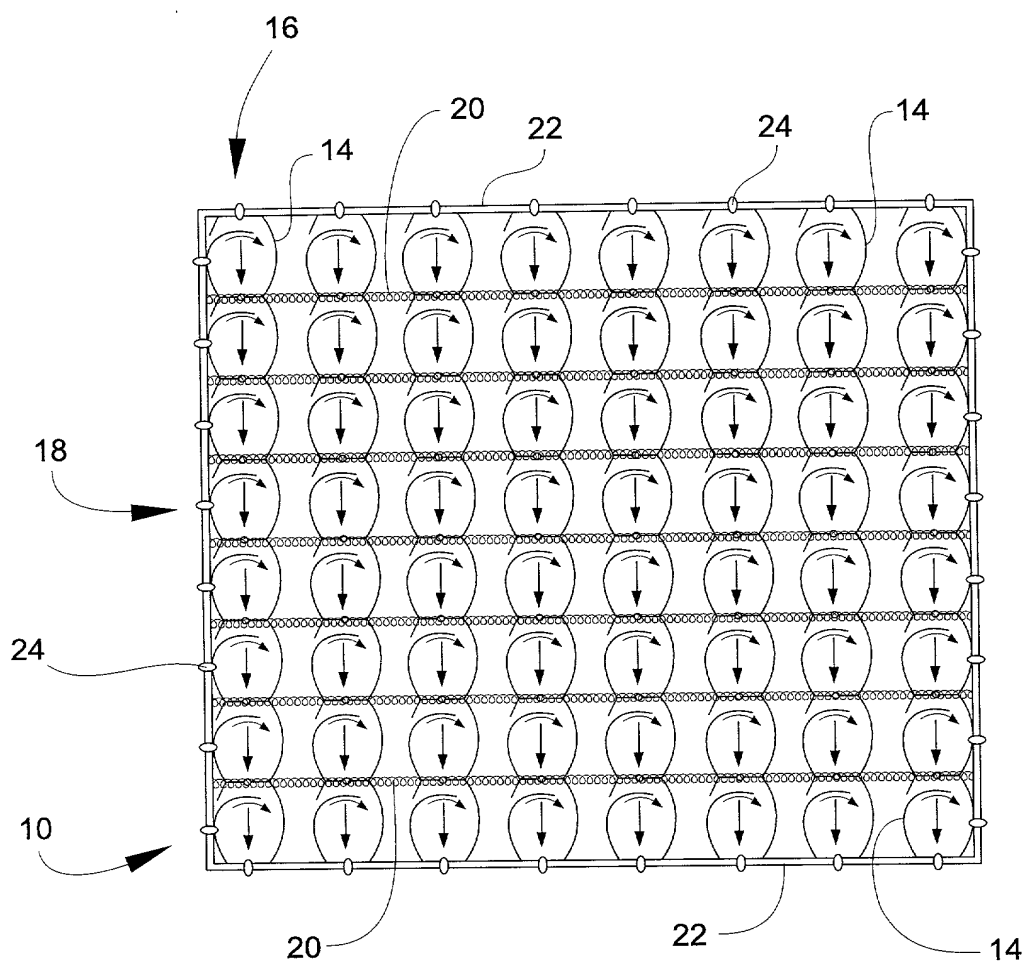


Fig. 1  
(PRIOR ART)

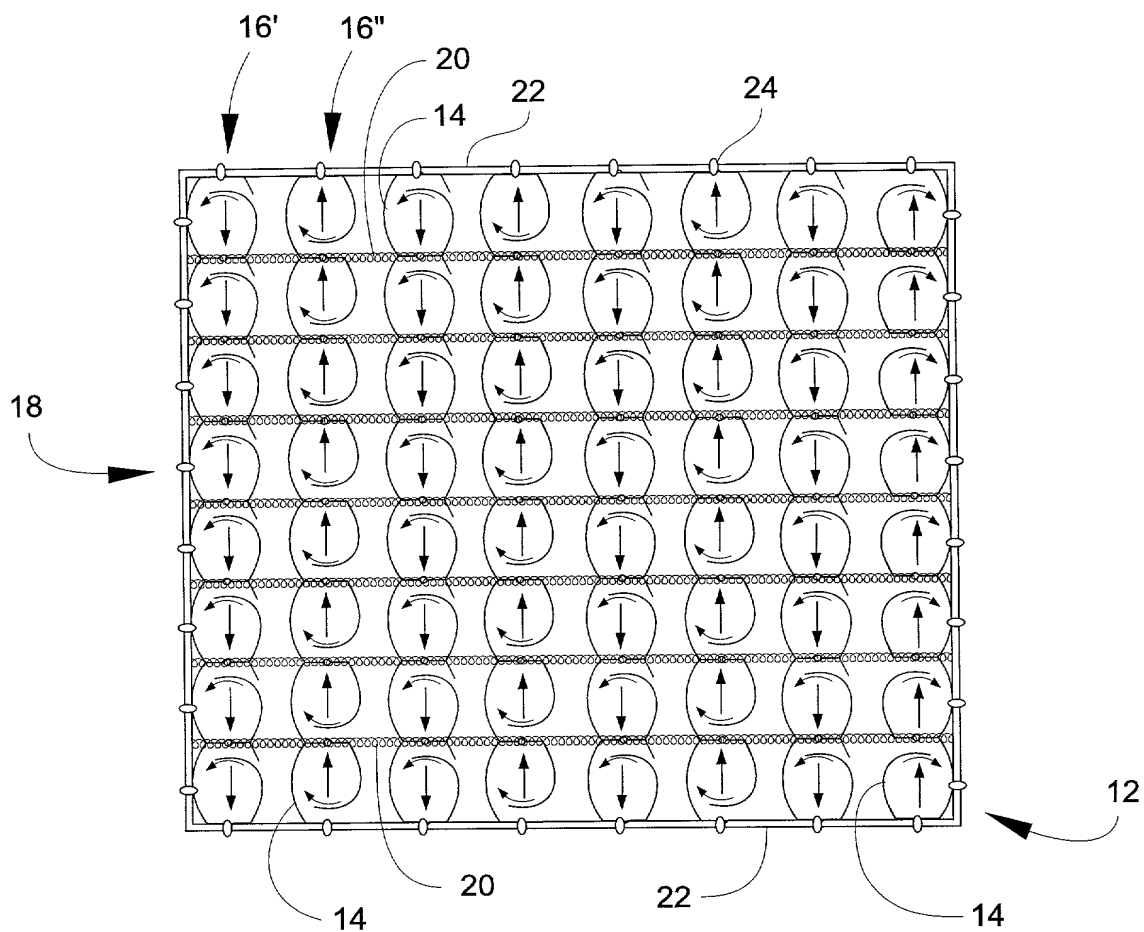


Fig. 2  
(PRIOR ART)

Diagram illustrating a flexible, elongated device 14, which is a component of a catheter. The device 14 is shown in a coiled configuration. A cross-sectional view 14' shows a multi-layered structure. A detail view 14''' shows a specific feature of the device. A tail section 14'' is also indicated.

**Fig. 3B**

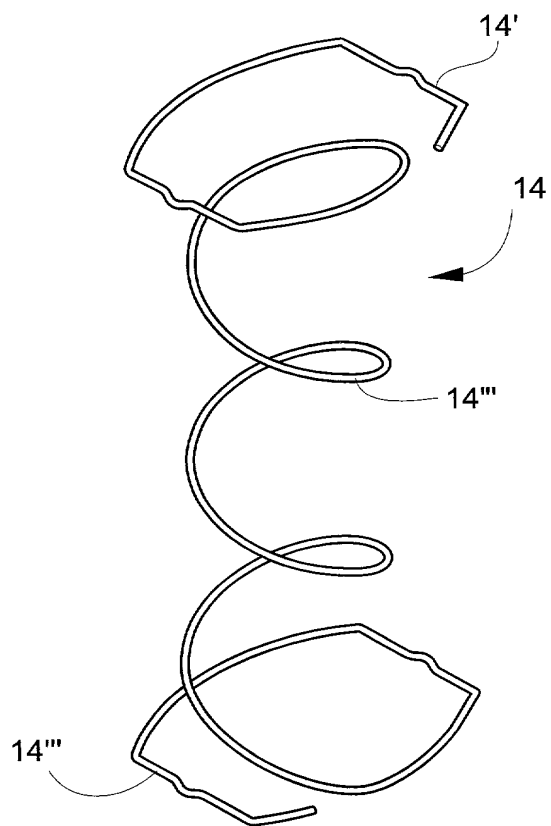


Fig. 4A

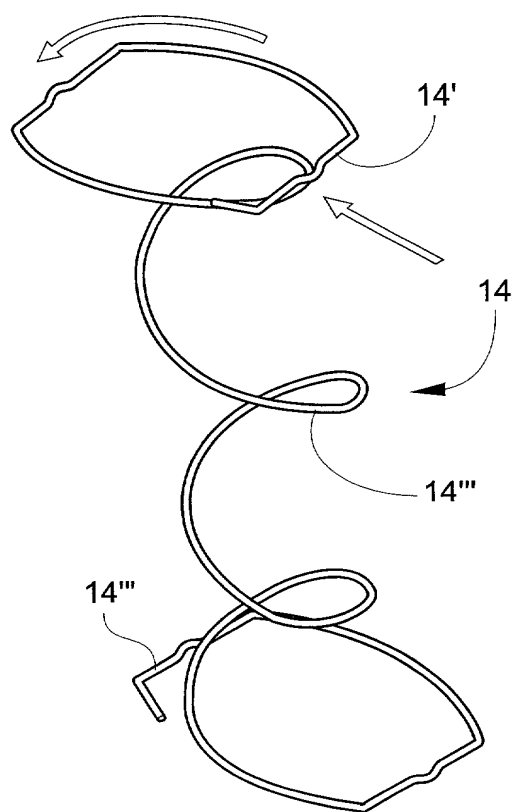


Fig. 4B



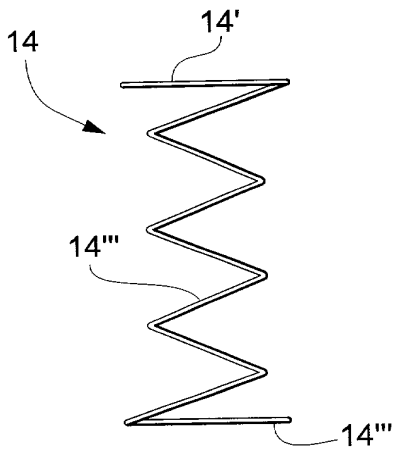


Fig. 5A

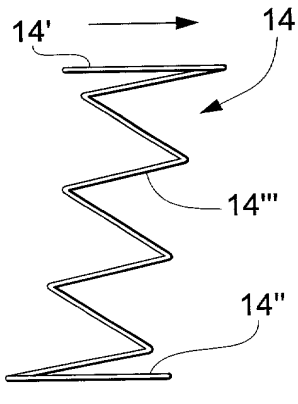


Fig. 5B

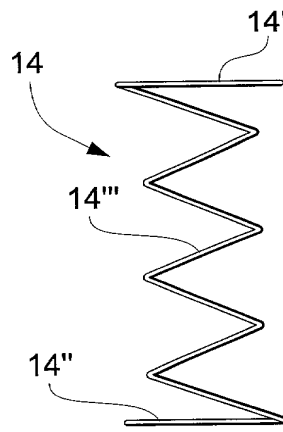


Fig. 6A

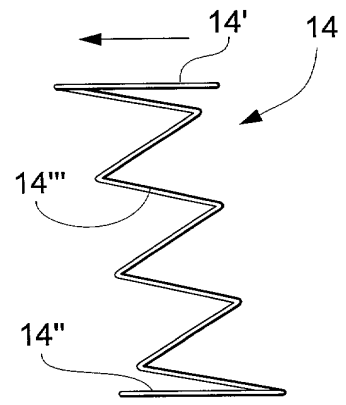


Fig. 6B

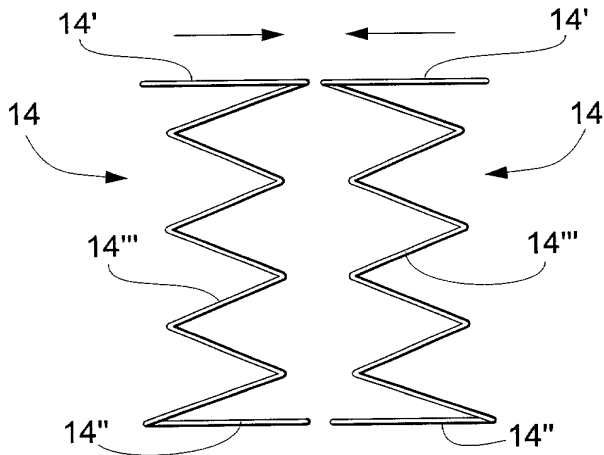


Fig. 8

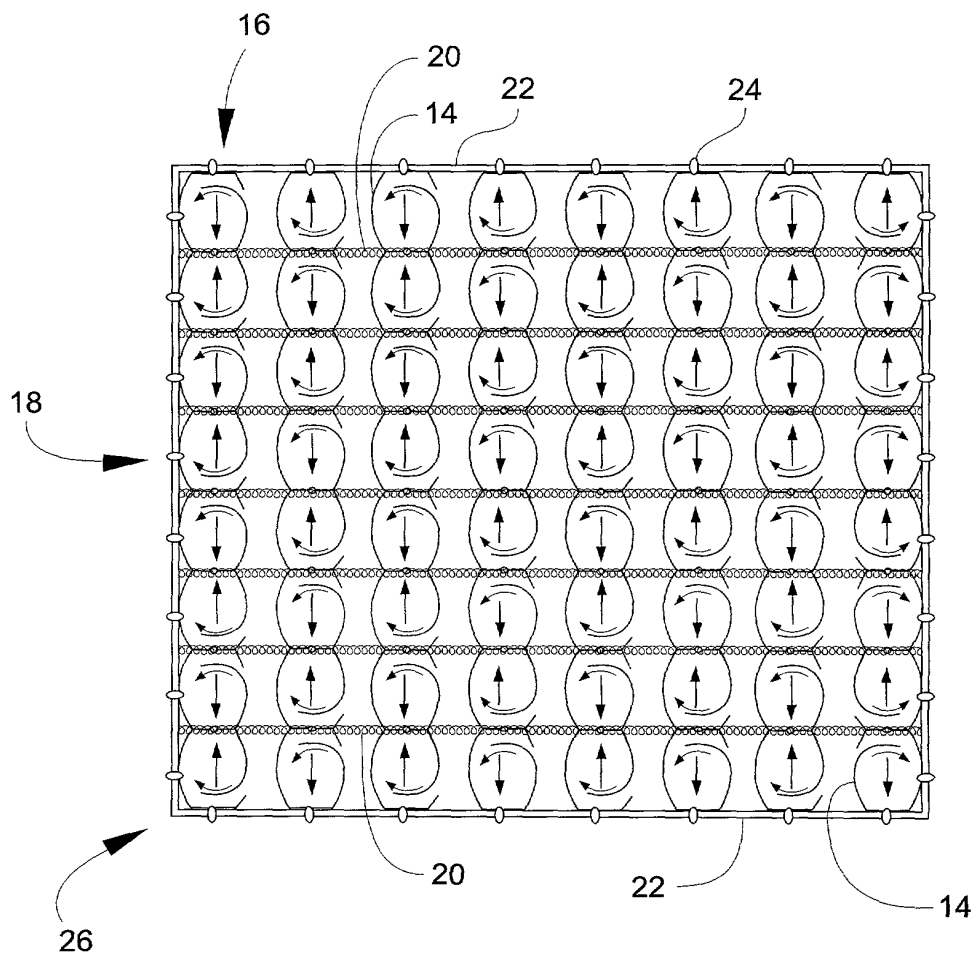


Fig. 7

Fig. 9

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)</b>  <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing      OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	<b>Attorney Docket Number</b>	18236.116
	<b>First Named Inventor</b>	Kevin N. McCraw
	<b>COMPLETE IF KNOWN</b>	
	Application Number	
	Filing Date	
	Group Art Unit	
	Examiner Name	

**As a below named inventor, I hereby declare**

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**MATTRESS SPRING CUSHION ASSEMBLY WITH COMBINATION OF RIGHT-HAND AND LEFT-HAND SPRNG UNITS**

the specification of which (Title of the Invention)

☒ is attached hereto  
OR  
☐ was filed on (MM/DD/YYYY) [ ] as United States Application Number or PCT International

Application Number [ ] and was amended on (MM/DD/YYYY) [ ] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
		<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

**Burden Hour Statement:** This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)  
Approved for use through 9/30/00 OMB 0651-0032  
Patent and Trademark Office, U S DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

U. S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U S or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith

☒ Customer Number

021878

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer  
Number Bar Code  
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto

Direct all correspondence to:

☐


Customer Number or  
Bar Code Label

OR

☒ Correspondence address below

Name	Karl S. Sawyer, Jr.				
Address	KENNEDY COVINGTON LOBDELL & HICKMAN, LLP				
Address	100 N. Tryon St., 4200 Bank of America Corporate Center				
City	Charlotte	State	NC	ZIP	28202-4006
Country	US	Telephone	704-331-7400	Fax	704-331-7598

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

Name of Sole or First Inventor:	<input type="checkbox"/> A petition has been filed for this unsigned inventor				
Given Name (first and middle (if any))			Family Name or Surname		
Kevin N.			MCCRAW		
Inventor's Signature				Date	7-15-00
Residence: City	Micaville	State	NC	Country	US
Post Office Address	Highway 80 South				
Post Office Address	P.O. Box 125				
City	Micaville	State	NC	ZIP	28755
				Country	US
<input checked="" type="checkbox"/> Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto					

Please type a plus sign (+) inside this box ➡ +


Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

PTO/SB/02A (3-97)  
Approved for use through 9/30/98. OMB 0651-0032  
Patent and Trademark Office, U S DEPARTMENT OF COMMERCE

+

## DECLARATION

ADDITIONAL INVENTOR(S)  
Supplemental Sheet  
Page 1 of 1

<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor											
Given Name (first and middle [if any])				Family Name or Surname											
Stuart				SPILLER											
Inventor's Signature					Date		7/19/00								
Residence: City		Sheboygan		State		WI		Country		US		Citizenship		US	
Post Office Address		P.O. Box 1023													
Post Office Address															
City		Sheboygan		State		WI		ZIP		53082		Country		US	
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor											
Given Name (first and middle [if any])				Family Name or Surname											
Inventor's Signature								Date							
Residence: City				State				Country				Citizenship			
Post Office Address															
Post Office Address															
City				State				ZIP				Country			
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor											
Given Name (first and middle [if any])				Family Name or Surname											
Inventor's Signature								Date							
Residence: City				State				Country				Citizenship			
Post Office Address															
Post Office Address															
City				State				ZIP				Country			

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+

37 C.F.R. §3.73(B) STATEMENT AND POWER OF ATTORNEY

The Assignee for the U.S. Patent Application filed herewith entitled **MATTRESS SPRING CUSHION ASSEMBLY WITH COMBINATION OF RIGHT-HAND AND LEFT-HAND SPRING UNITS** (hereinafter "Patent Application"), and the invention disclosed therein, hereby states pursuant to 37 C.F.R. §3.73(b) that the Assignee is now the sole owner of the Patent Application to the exclusion of each inventor thereof.


The Assignee establishes its ownership by submission herewith of an Assignment from each inventor of the Patent Application and the Assignee requests recordation thereof in the records of the U.S. Patent & Trademark Office. As the established owner of the Patent Application, the Assignee hereby invokes its right to conduct prosecution of the Patent Application to the exclusion of each named inventor.

The Assignee further hereby appoints the Attorneys and Patent Agents of Kennedy Covington Lobdell & Hickman, L.L.P., as identified by **Customer Number 021878** in the records of the U.S. Patent & Trademark Office and as updated from time to time, to prosecute the Patent Application and to transact all business in the U.S. Patent & Trademark Office connected therewith. All correspondence in this case should be directed to:

**Karl S. Sawyer, Jr.**  
**Kennedy Covington Lobdell & Hickman, L.L.P.**  
**Bank of America Corporate Center, Suite 4200**  
**100 N. Tryon St., Charlotte, NC 28202-4006**

The telephone number is (704) 331-7400 and the facsimile number is (704) 331-7598.

The Assignee hereby declares that no other person or entity is authorized to take any action before the U.S. Patent & Trademark Office with respect to the Patent Application. The undersigned (whose title is supplied below) is empowered to sign this statement on behalf of the Assignee.

By: **Hickory Springs Manufacturing Company**  
  
Signature of Corporate Officer  
July 20, 2000  
Date  
J. Donald Coleman  
Name of Corporate Officer  
President  
Title of Corporate Officer